


ORACAL® Wrap Film Series 970


Glossy standard



Glossy metallic

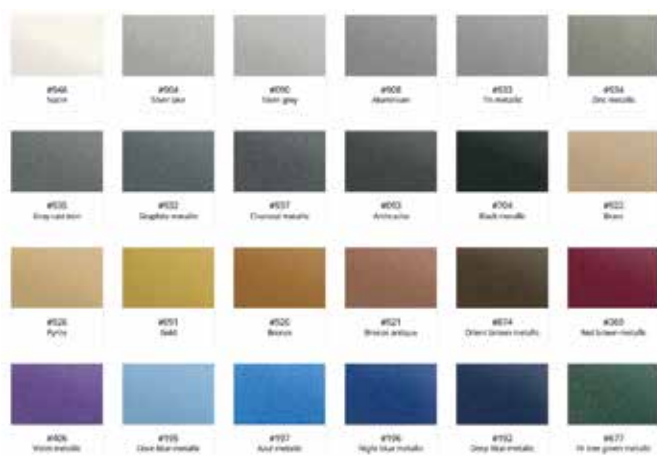

Matt metallic

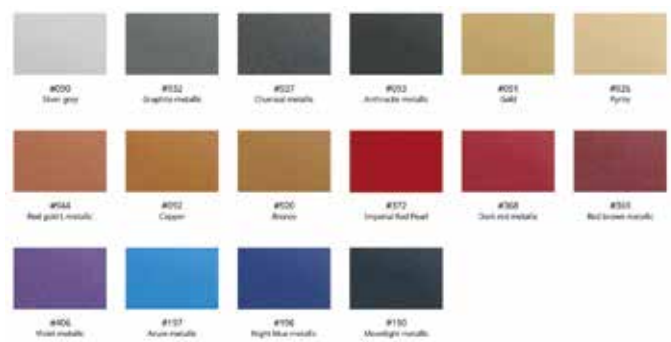

Matt standard



Super matt



Colours may not be a 100% colour match of actual material.

Surfaces to which the material will be applied must be thoroughly cleaned and free from dust, grease or any other contamination that could affect the adhesion of the material. Freshly lacquered or painted surfaces should be allowed to dry for at least three weeks and to completely cure. The compatibility of selected lacquers and paints should be tested by the user, prior to application of the material. Furthermore, the application information published by ORAFOL must be considered. The batch traceability according to ISO 9001 is possible on the basis of the roll number.

